

007SB Water & Liquids Delivery SuperElastic Hose




-20°C | +60°C
TEMPERATURE RANGE

HIGH FLEXIBILITY

LOW TEMPERATURE RESISTANCE

EN This hose can be used for suction and delivery of water and other liquids in Agriculture, especially suitable for water pump connection

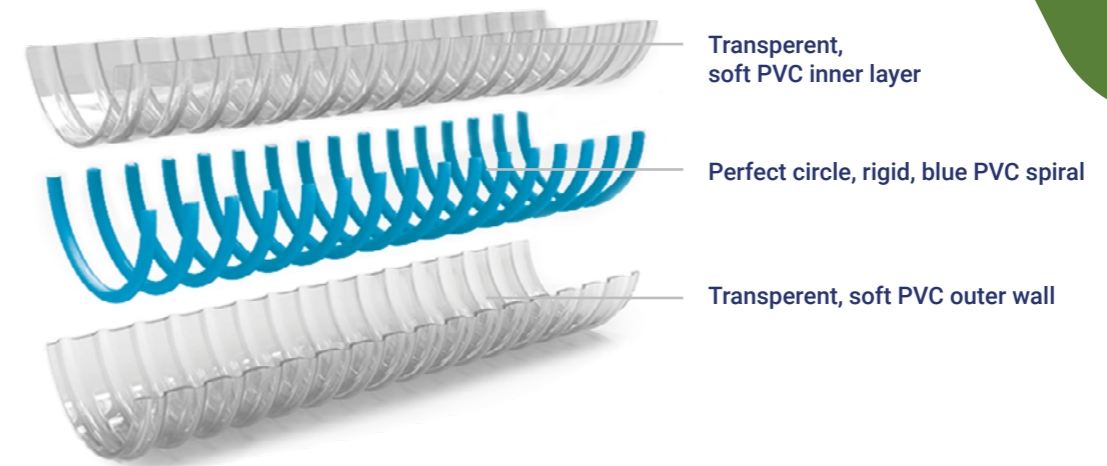

code	inch	mm	gr/m	bar	mbar	mm	m
F007SB013	1/2	13	115	8	600	39	25/30/50
F007SB016	5/8	16	145	7	600	48	25/30/50
F007SB019	3/4	19	185	6	600	57	25/30/50
F007SB020		20	195	6	600	60	25/30/50
F007SB025	1	25	230	6	600	75	25/30/50
F007SB030		30	280	5	600	90	25/30/50
F007SB032	1 1/4	32	290	5	600	96	25/30/50
F007SB035		35	440	5	600	105	25/30/50
F007SB038	1 1/2	38	440	5	600	114	25/30/50
F007SB040		40	520	4	600	120	25/30/50
F007SB045	1 3/4	45	570	4	600	135	25/30/50
F007SB051	2	51	690	4	600	153	25/30/50
F007SB055		55	740	4,0	600	165	25/30/50
F007SB060		60	800	3,5	600	180	25/30/50
F007SB063	2 1/2	63	890	3,5	600	189	25/30/50
F007SB070		70	1020	3,5	600	221	25/30/50
F007SB076	3	76	1120	3	600	229	25/30/50
F007SB080		80	1345	3	600	259	25/30/50
F007SB090	3 1/2	90	1500	2	600	281	25
F007SB102	4	102	1700	2	600	322	25

* **Working and bursting pressure valid at 20°C** / Pression de fonctionnement et limite, à 20 ° C / Presión de trabajo y estallido válida a 20°C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C
 ** **Length tolerance +/- 5%** / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% / Längentoleranz +/- 5% / Допуск длины +/- 5%
 *** **Inner Diameter tolerance +/- 2%** / Tolérance de diamètre interne +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%

