


137N Air Conditioner Drain Transperent Hose







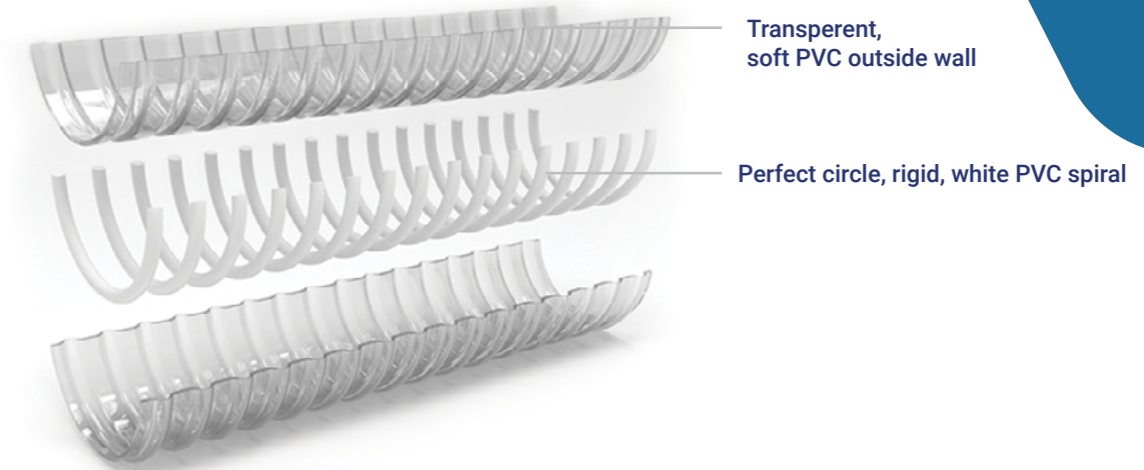


 **-10°C | +60°C**
TEMPERATURE
RANGE

 **HIGH**
FLEXIBILITY

EN This hose can be used for draining out condensation water from air conditioner indoor unit.



|  |  |  |  |  |  |  |
|---|---|---|---|---|---|---|
| code | inch | mm | gr/m | mbar | mm | m |
| F137N016 | 5/8 | 16 | 80 | 400 | 32 | 25/30/50 |
| F137N018 | | 18 | 100 | 400 | 36 | 25/30/50 |
| F137N019 | 3/4 | 19 | 100 | 400 | 38 | 25/30/50 |

* **Working and bursting pressure valid at 20°C** / Pression de fonctionnement et limite, à 20 ° C / Presión de trabajo y estallido válida a 20°C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C

** **Length tolerance +/- 5%** / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% / Längentoleranz +/- 5% / Допуск длины +/- 5%

*** **Inner Diameter tolerance +/- 2%** / Toleranz des inneren Durchmessers +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%

