


007N Food Quality Suction & Delivery Hose

FR Tuyau d'aspiration et de transport adapté à l'industrie alimentaire
ES Manguera de succión y entrega apta para la industria alimentaria
DE Saug- und Förderschlauch in Lebensmittelqualität
RU Пищевой напорно-всасывающий шланг ПВХ



-10°C | +60°C
TEMPERATURE RANGE



FOOD QUALITY
10/2011 A, B, C, D1


EN This hose can be used for suction and delivery of water and other liquids in Agriculture or Food Industry.

FR Ce tuyau peut être utilisé comme un tuyau d'aspiration et de transport pour eau et d'autres liquides dans l'agriculture et Industrie alimentaire.

ES Dieser Schlauch kann zum Ansaugen und Fördern von Wasser und anderen Flüssigkeiten in der Landwirtschaft oder im Nahrungsmittelindustrie.

DE Esta manguera se puede utilizar para la succión y la entrega de agua y otros líquidos en la agricultura o la industria alimentaria.

RU Этот шланг можно использовать для всасывания и транспортировки воды и других жидкостей в сельском хозяйстве и пищевой промышленность.

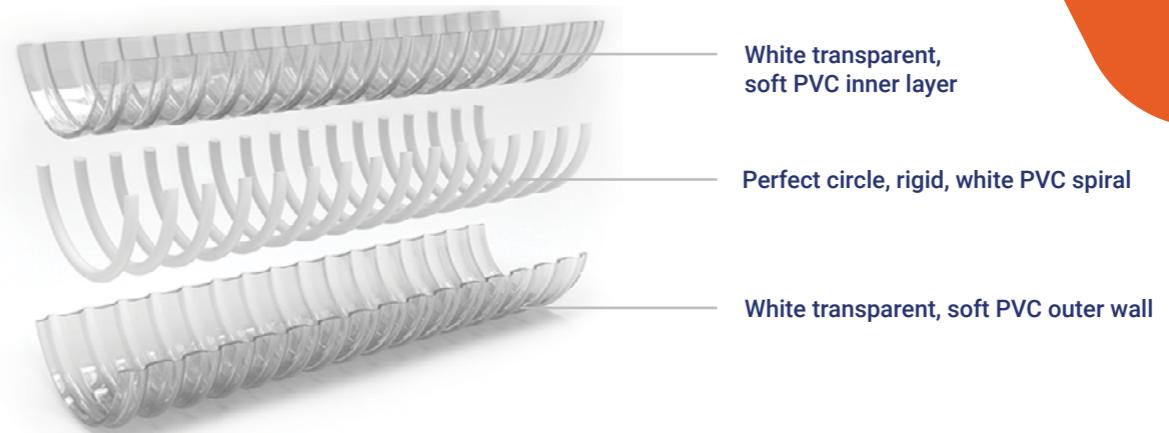

White transparent,
soft PVC inner layer

Perfect circle, rigid, white PVC spiral

White transparent, soft PVC outer wall

code	inch	mm	gr/m	bar	mbar	mm	m
F007N013	1/2	13	115	9	650	52	25/30/50
F007N016	5/8	16	145	9	650	64	25/30/50
F007N019	3/4	19	185	8	650	76	25/30/50
F007N020		20	195	8	650	80	25/30/50
F007N025	1	25	230	7	650	100	25/30/50
F007N030		30	280	7	650	120	25/30/50
F007N032	1 1/4	32	290	6	650	128	25/30/50
F007N035		35	440	6	650	140	25/30/50
F007N038	1 1/2	38	440	6	650	152	25/30/50
F007N040		40	520	5,5	650	160	25/30/50
F007N045	1 3/4	45	570	5	650	180	25/30/50
F007N051	2	51	690	5	650	200	25/30/50
F007N055		55	740	5	650	220	25/30/50
F007N060		60	800	5	650	240	25/30/50
F007N063	2 1/2	63	890	5	650	252	25/30/50
F007N070	2 3/4	70	1020	4	650	280	25/30/50
F007N076	3	76	1120	4	650	300	25/30/50
F007N080		80	1345	4	650	345	25/30/50
F007N090	3 1/2	90	1500	3	650	375	25
F007N102	4	102	1700	3	650	429	25

* Working and bursting pressure valid at 20°C / Pression de fonctionnement et limite, à 20°C / Pression de fonctionnement et limite, à 20 ° C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C

** Length tolerance +/- 5% / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% ? Längentoleranz +/- 5% / Допуск длины +/- 5%

*** Inner Diameter tolerance +/- 2% / Tolérance de diamètre interne +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%



Other colors are available against MOQ

- Autres couleurs et longueurs sont disponibles avec la quantité minimale d'un ordre
- Se ofrecen otros colores y longitudes contra una cantidad mínima de pedido
- Andere Farben sind gegen Mindestbestellmenge erhältlich
- В другом цвете возможен при соблюдении минимальных количеств к заказу