

501N

Food Quality Suction & Delivery Hose

ES

DE

RU

Manguera de calidad alimentaria reforzada con espiral metálica
Lebensmittelgeeigneter, stahlverstärkter Saug- und Förderschlauch
Пищевой всасывающий и напорный шланг с металлическим армированием



-10°C | +60°C
TEMPERATURE
RANGE



SMOOOTH
INSIDE



LOW
CORRUIGATION



FOOD
QUALITY
10/2011 A, B,
C, D1

EN

Suitable for the suction and transfer of potable water, juices, and distillates with an alcohol content of up to 50° as well as aggressive liquids such as milk and other food products, excluding vegetable oils.

ES


Adecuada para la aspiración e impulsión de agua potable, zumos y destilados con un contenido de alcohol de hasta 50°, así como líquidos alimentarios como leche y otros productos alimenticios, excepto aceites vegetales.

DE

Geeignet für das Ansaugen und Fördern von Trinkwasser, Säften und Destillaten mit einem Alkoholgehalt von bis zu 50°, sowie von aggressiven Flüssigkeiten wie Milch und anderen Lebensmitteln, ausgenommen pflanzliche Öle.

RU

Подходит для всасывания и подачи питьевой воды, соков и дистиллятов с содержанием алкоголя до 50°, а также пищевых жидкостей, таких как молоко и другие пищевые продукты, за исключением растительных масел.

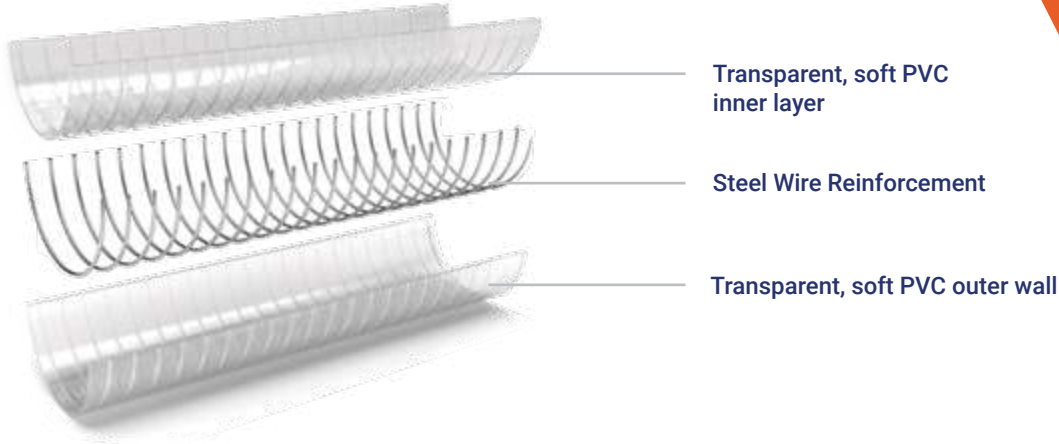

							
code	inch	mm	gr/m	bar	mbar	mm	m
S501N019	3/4	19	320	7	900	48	25/30/50
S501N025	1	25	510	6	900	63	25/30/50
S501N032	1 1/4	32	650	5	900	80	25/30/50
S501N038	1 1/2	38	800	5	900	228	25/30/50
S501N040		40	850	5	900	240	25/30/50
S501N051	2	51	1250	5	900	300	25/30/50
S501N063	2 1/2	63	1950	4	850	378	25/30
S501N076	3	76	2450	4	850	450	25/30
S501N102	4	102	3500	2.5	800	600	25/30

* Working and bursting pressure valid at 20°C / PPression de fonctionnement et limite, à 20 ° C / Presión de trabajo y estallido válida a 20°C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C

** Length tolerance +/- 5% / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% / Längentoleranz +/- 5% / Допуск длины +/- 5%

*** Inner Diameter tolerance +/- 2% / Tolérance de diamètre interne +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%

- 
- Other colors are available against MOQ

Autres couleurs et longueurs sont disponibles avec la quantité minimale d'un ordre

Se ofrecen otros colores y longitudes contra una cantidad mínima de pedido

Andere Farben sind gegen Mindestbestellmenge erhältlich

В другом цвете возможен при соблюдении минимальных количеств к заказу



REACH
COMPLIANT



RoHS
COMPLIANT



ISO
9001:2015
CERTIFIED