
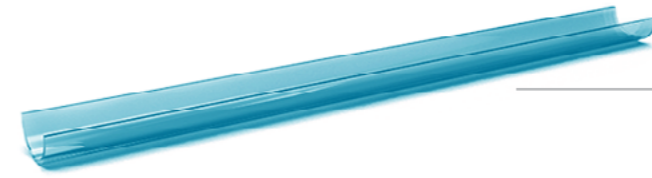


600Z Cristal Hose for Aquariums




-10°C | +60°C
TEMPERATURE
RANGE

EN Soft PVC hose in single layer, for transporting liquids and maintenance of aquariums.



Single layer of transparent soft PVC, not reinforced

code	mm	mm	gr/m	bar	bar	m
V600Z00406	4	6	19	4	12	25/50/100
V600Z00407	4	7	35	9	27	25/50/100
V600Z00507	5	7	23	4	12	25/50/100
V600Z00608	6	8	28	4	12	25/50/100
V600Z00609	6	9	45	5	15	25/50/100
V600Z00610	6	10	62	9	27	25/50/100
V600Z00612	6	12	104	11	33	25/50/100
V600Z00710	7	10	57	4	12	25/50/100
V600Z00711	7	11	68	8	24	25/50/100
V600Z00811	8	11	55	4	12	25/50/100
V600Z00812	8	12	78	7	21	25/50/100
V600Z00912	9	12	61	3	9	25/50/100
V600Z00913	9	13	84	5	15	25/50/100
V600Z01013	10	13	66	4	12	25/50/100
V600Z01014	10	14	95	6	18	25/50/100
V600Z01016	10	16	151	7	21	25/50/100
V600Z01216	12	16	110	4	12	25/50/100
V600Z01319	13	19	184	6	18	25/50/100
V600Z01418	14	18	125	4	12	25/50/100
V600Z01519	15	19	132	4	12	25/50/100
V600Z01620	16	20	140	2.5	7.5	25/50/100
V600Z01621	16	21	177	3	9	25/50/100
V600Z01823	18	23	198	3	9	25/50/100
V600Z01924	19	24	210	3	9	25/50/100
V600Z01925	19	25	253	3	9	25/50/100
V600Z02025	20	25	220	2.5	7.5	25/50/100
V600Z02026	20	26	264	3	9	25/50/100
V600Z02228	22	28	290	3	9	25/50/100
V600Z02230	22	30	395	4	12	25/50/100
V600Z02531	25	31	324	2.5	7.5	25/50/100
V600Z02533	25	33	445	3.5	10.5	25/50/100



* Working and bursting pressure valid at 20°C / Pression de fonctionnement et limite, à 20° C / Presión de trabajo y estallido válida a 20°C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C
 ** Length tolerance +/- 5% / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% / Längentoleranz +/- 5% / Допуск длины +/- 5%
 *** Inner Diameter tolerance +/- 2% / Tolérance de diamètre interne +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%