



Liquids and Abrasives Heavy Suction & Delivery Hose

FR Tuyau d'aspiration et de refoulement lourd pour liquides et abrasifs
ES Manguera pesada de succión y entrega de líquidos y abrasivos
DE Schwerer Saug- und Druckschlauch für Flüssigkeiten und Schleifmittel
RU Тяжелый всасывающий и напорный шланг для жидкостей и абразивов

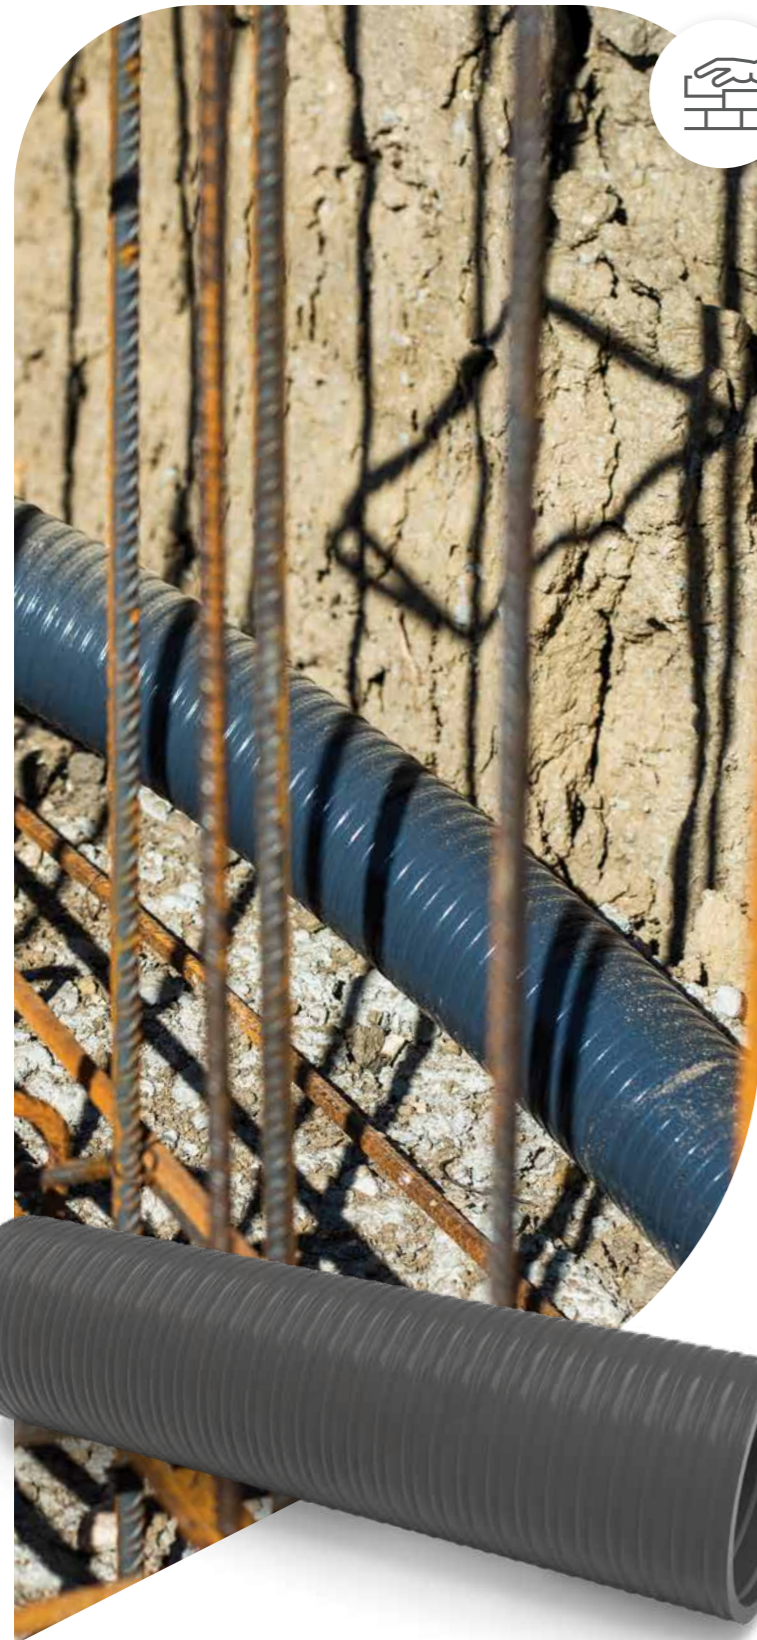


EN This hose can be used for suction and delivery of fresh and sea water, sewage, fertilizers, chemical solutions, abrasive solids and slurries etc.

FR Ce tuyau peut être utilisé pour l'aspiration et le refoulement d'eau douce et d'eau de mer, des eaux usées, des engrais, solutions chimiques, solides abrasifs et bouillies etc.

ES Esta manguera se puede utilizar para succión y entrega. De agua dulce y de mar, aguas residuales, fertilizantes, soluciones químicas, sólidos abrasivos y lodos etc.

DE Dieser Schlauch kann zum Saugen und Ausgeben verwendet werden von Süß- und Meerwasser, Abwasser, Düngemitteln, chemische Lösungen, abrasive Feststoffe u Schlämme usw.

RU Этот шланг можно использовать для всасывания и нагнетания пресной и морской воды, сточных вод, удобрений, химические растворы, абразивные твердые вещества и суспензии и т. д.

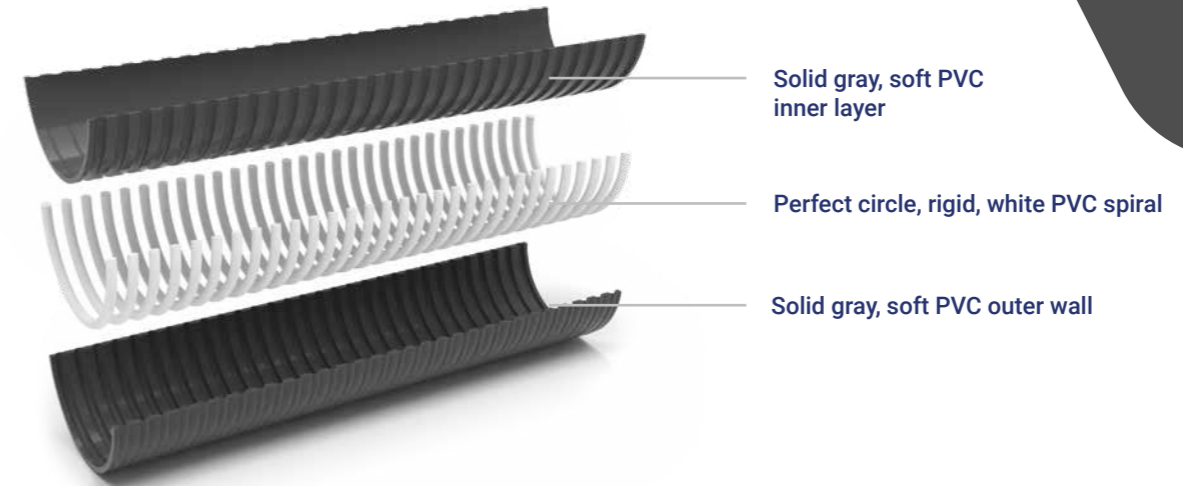

code	inch	mm	gr/m	bar	mbar	mm	m
F021N019	3/4	19	415	7	950	114	25/30/50
F021N020		20	425	7	950	120	25/30/50
F021N025	1	25	555	7	950	150	25/30/50
F021N030		30	630	6	950	180	25/30/50
F021N032	1 1/4	32	680	6	950	192	25/30/50
F021N035		35	730	5	950	210	25/30/50
F021N038	1 1/2	38	775	5	950	228	25/30/50
F021N040		40	825	5	950	240	25/30/50
F021N045	1 3/4	45	970	5	950	270	25/30/50
F021N051	2	51	1165	5	950	300	25/30/50
F021N055		55	1360	5	950	330	25/30/50
F021N060		60	1550	5	950	360	25/30/50
F021N063	2 1/2	63	1700	5	950	378	25/30/50
F021N070	2 3/4	70	1845	4	950	420	25/30/50
F021N076	3	76	1940	4	950	450	25/30/50
F021N080		80	2135	4	950	480	25/30/50
F021N090	3 1/2	90	2425	4	950	540	25
F021N102	4	102	3200	4	950	600	25
F021N110	4 1/4	110	3590	4	950	660	25
F021N120		120	3880	3	900	720	25
F021N127	5	127	4075	3	900	750	25
F021N152	6	152	6110	3	900	900	25

* Working and bursting pressure valid at 20°C / Pression de fonctionnement et limite, à 20 ° C / Presión de trabajo y estallido válida a 20°C / Betriebsdruck und Berstdruck gültig bei 20°C / Рабочее давление и разрывное давление, при 20°C
 ** Length tolerance +/- 5% / Tolérance de longueur +/- 5% / Tolerancia de longitud +/- 5% / Längentoleranz +/- 5% / Допуск длины +/- 5%
 *** Inner Diameter tolerance +/- 2% / Tolérance de diamètre interne +/- 2% / Tolerancia del diámetro interno +/- 2% / Toleranz des inneren Durchmessers +/- 2% / Допуск внутреннего диаметра +/- 2%

Other colors are available against MOQ
 Autres couleurs et longueurs sont disponibles avec la quantité minimale d'un ordre
 Se ofrecen otros colores y longitudes contra una cantidad mínima de pedido
 Andere Farben sind gegen Mindestbestellmenge erhältlich
 В другом цвете возможен при соблюдении минимальных количеств к заказу

